



# SPRING 10

- **10.1" High Brightness Display**
- **Vehicle-grade CPU**
- **IP65 Sealing Level Design**
- **Support 500K CANbus\*2** (J1939, CANopen, ISO15765)
- **9-36V Wide Voltage Input, Supports Ignition Detection**



Vehicle Grade CPU



IP65



High Brightness  
Screen






CANbus



CPDEVICE

# Product Specs

System	Quad-core, 1.2GHz 2G RAM 16G ROM Android 6.0.1/Linux 3.10	Display	10.1", 1024*600p, 750cd/㎡ 5-Point Capacitive Multi-touch Screen
Communication	2.4GHz Wifi, IEEE 802.11 b/g/n BT 4.0, BLE 4G/LTE Optional Meter-level GNSS, Optional Centi-meter Level GNSS OEM Board Built-in MIC (Optional) Built-in Speaker	I/O Interface	RS-232*2 RS-485*1 CAN*1 or CAN*2 (Supports J1939, CANopen, ISO15765) DI*1 or DI*2, DO*2 USB 2.0*1 CVBS Camera*2 or CVBS Camera*4 12V DC OUT*1 Ethernet*1 (Optional)
Rugged Feature	IP65 Vibration & Shock: MIL-STD-810 Road Vehicle Standard: ISO16750 Humidity 95%, Non-condensing Operation Temperature: -20°C ~+70°C Storage Temperature: -40°C ~+85°C	Power Management	9-36V DC Input Ignition Control
Button	Power Key*1, Function Key*2	Mechanical Spec	Dimension (W*H*D): 281*181*42mm Weight: 1.5kg
		Connector Type	Standard Industry Waterproof Connector (4 Types of Pin Definition) SMA Female Connector*1 (4G) TNC Female Connector*2 (GNSS)

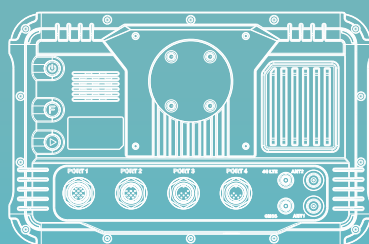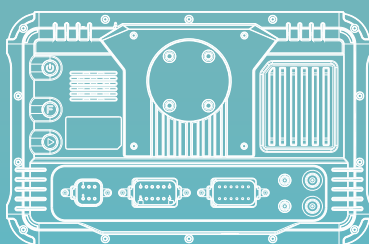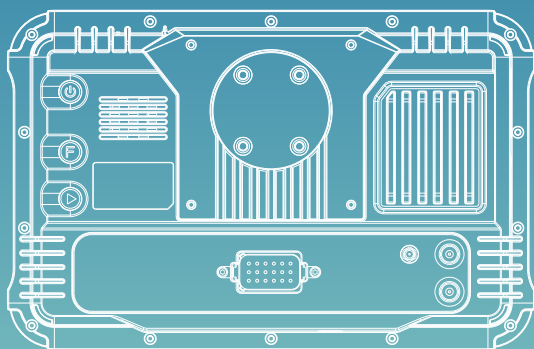

## APPLICATIONS



Agriculture



Construction



HMI