



SPRING 8

- 8" High Brightness Display
- Vehicle-grade CPU
- IP65 Sealing Level Design
- Supports 250K/500K CANbus (J1939, CANopen, ISO15765)
- 9-36V Wide Voltage Input, Supports Ignition Detection
- 9 Physical Keys for Easier Operation



Vehicle Grade CPU



IP65



High Brightness Screen



CANbus




Multiple Physical Keys



CPDEVICE

Product Specs

System	Quad-core, 1.2GHz 2G RAM 16G ROM Android 6.0.1/Linux 3.10	Display	8", 1280*720p, 750cd/m ² 5-Point Capacitive Multi-touch Screen
Communication	2.4GHz WiFi, IEEE 802.11 b/g/n BT 4.0, BLE 4G/LTE Optional Meter-level GNSS, Optional Centi-meter Level GNSS OEM Board Built-in MIC (Optional) Built-in Speaker	I/O Interface	RS-232*2 RS-485*1 CAN*1 (Supports J1939, CANopen, ISO15765) DI*2, DO*2 USB 2.0*1 CVBS Camera*2 or CVBS Camera*4 12V DC OUT*2 Ethernet*1 (Optional)
Rugged Feature	IP65 Vibration & Shock: MIL-STD-810 Road Vehicle Standard: ISO16750 Humidity 95%, Non-condensing Operation Temperature: -20°C ~+70°C Storage Temperature: -40°C ~+85°C	Power Management	9-36V DC Input Ignition Control
Button	Power Key*1, Function Key*8	Mechanical Spec	Dimension (W*H*D): 224*160*45mm Weight: 1.36kg
		Connector Type	Standard Industry Waterproof Connector SMA Female Connector*2 (WiFi&4G) TNC Female Connector*2 (GNSS)

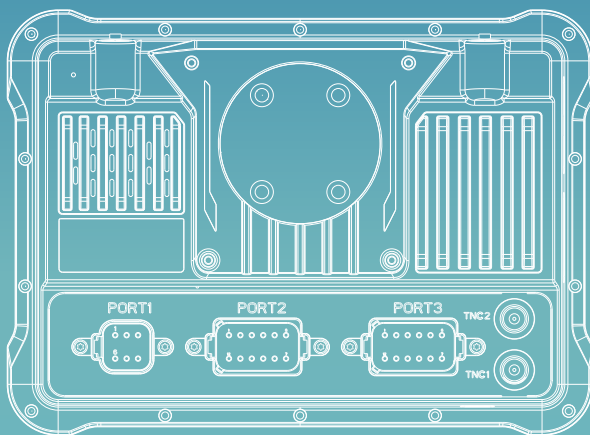

APPLICATIONS

